




design panels

# MONTĀŽAS INSTRUKCIJA

## INSTALLATION INSTRUCTION

[www.illipanel.com](http://www.illipanel.com)

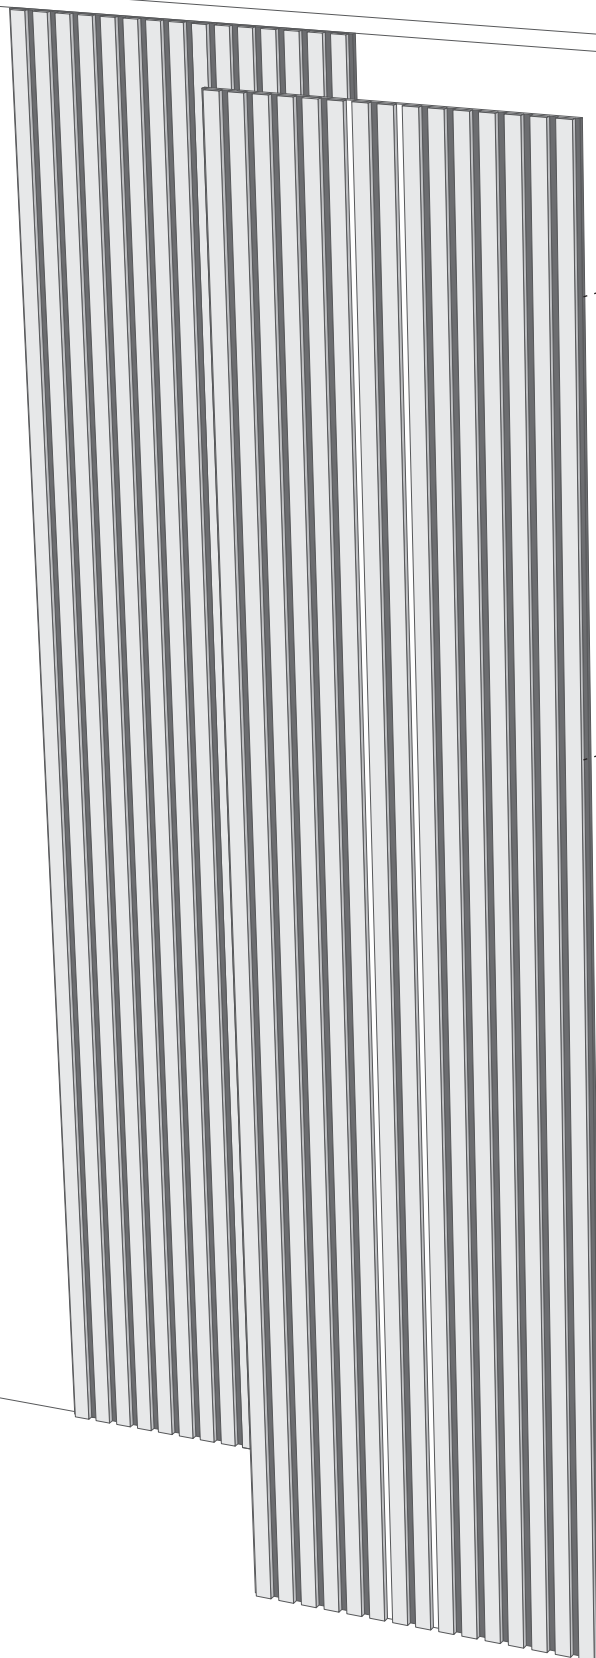

MONTĀŽAS INSTRUKCIJA LV	3
INSTALLATION INSTRUCTION EN	4

**1 INSTRUMENTI**



illipanelu montāžai nepieciešams līmeņrādis, skrūvgrieznis, zīmulis un melnas skrūves. Montāžu veikt ar kokvilnas cimdkiem, lai novērstu traipu risku uz koka virsmas.

**2 UZGLABĀŠANA**


Paneli jāuzglabā horizontālā stāvoklī. Telpai jābūt sausai un gaisa mitrums nedrīkst pārsniegt 10 - 12 % atzīmi. Pirms paneļu fiksācijas ieteicams paneļus montāžas telpā atstāt vismaz uz 48 stundām.

**3 IEVĒRĪBAI**

illipaneliem ir raksturīga viegla, gaistoša koka smarža.

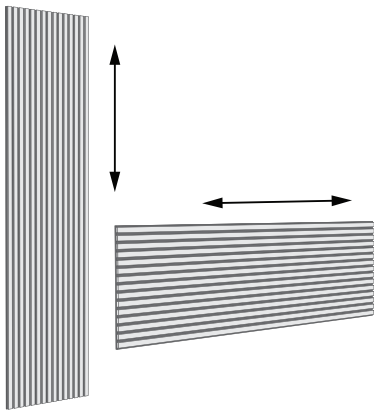
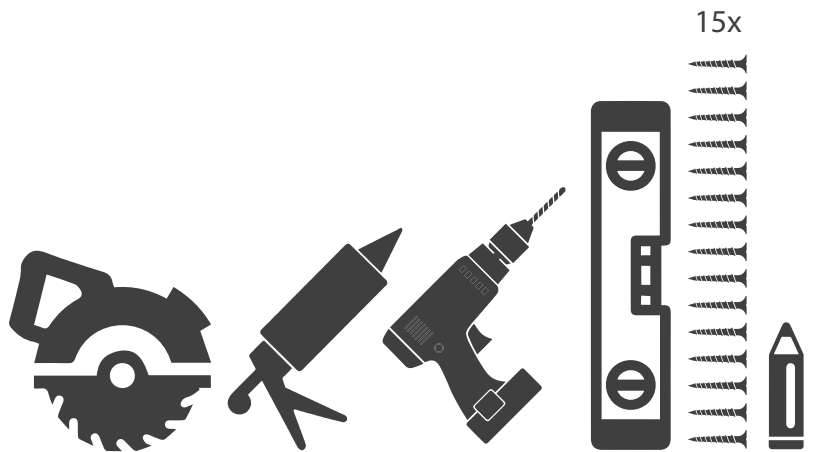

**4 PIEGRIEŠANA**

Izvēlies, kādā virzienā illipanelis tiks montēts - horizontāli vai vertikāli. Ja paneli piegriež, nēšķērsojot koka līstes, tad pietiek ar asu nazi, lai pārgrieztu filcu. Savukārt, ja paneli jāpiegriež, šķērsojot koka līsti, jāizmanto elektriskais rokas ripzāģis ar smalkzobu griezējripi.

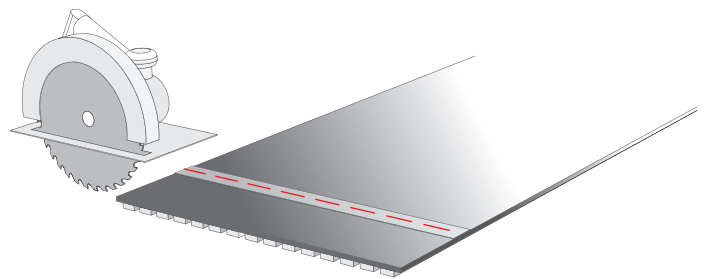

**6 STIPRINĀŠANA**

illipaneli stiprina telpā pie griestiem vai sienas ar skrūvēm, skrūvējot tās filcā, neskarot līsti. Ieteicams lietot illipanelu montāžas skrūves. Viena paneļa nostiprināšanai nepieciešamas 15 skrūves\*. Paneļus ieteicams stiprināt pie sienas izmantojot koka līstes, kuras izvietotas skrūvju vietās.

*\*Montāžas skrūves komplektā nav iekļautas. Skrūves ir iespējams iegādāties atsevišķi.*

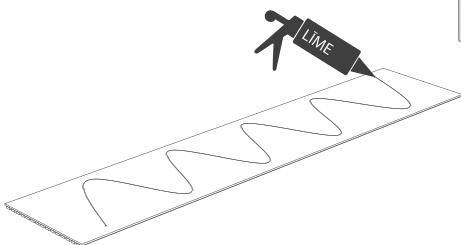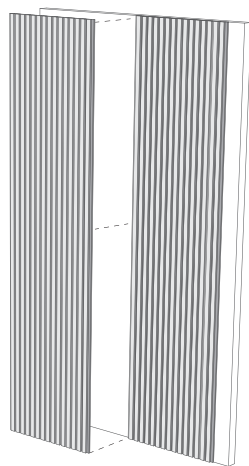
**5 IEVĒRĪBAI**

Zāģējot, panelim jābūt vērstam ar koka līstēm uz leju!

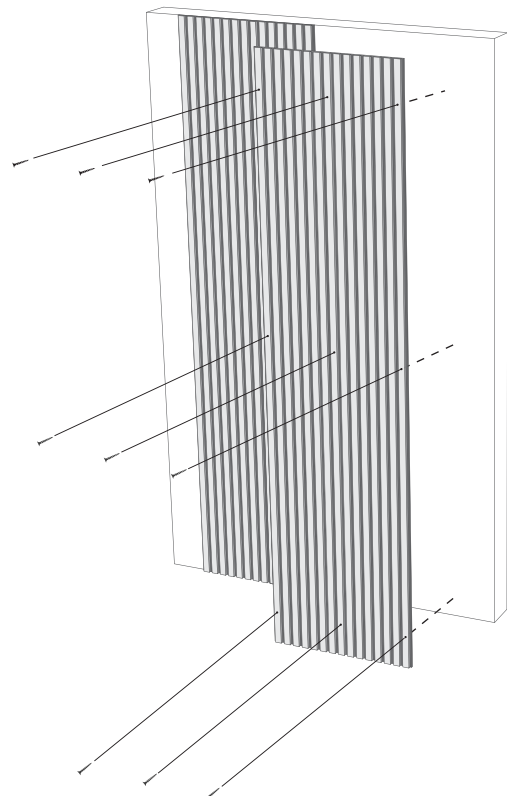
**7 SAZIŅA AR MEISTARU**

Neskaidrību vai jautājumu par montāžu gadījumā, sazinies ar illipanelu izplatītājiem. Profesionāls viedoklis profesionālam rezultātam.

+371 20 266 414

info@illipanel.com

**1 INSTRUMENTS**



The illi panel assembly requires a level, screwing, pencil and black screws. Mount with cotton gloves to avoid the risk of stains on the surface of the tree.

**2 STORAGE**

The panels must be stored in a horizontal position. The room must be dry and the humidity must not exceed the 10-12% mark. It is recommended that the panels be left in the assembly room for at least 48 hours prior to the panel fixation.


**3 ATTENTION**

illi panels are characterised by a mild, volatile smell of wood.

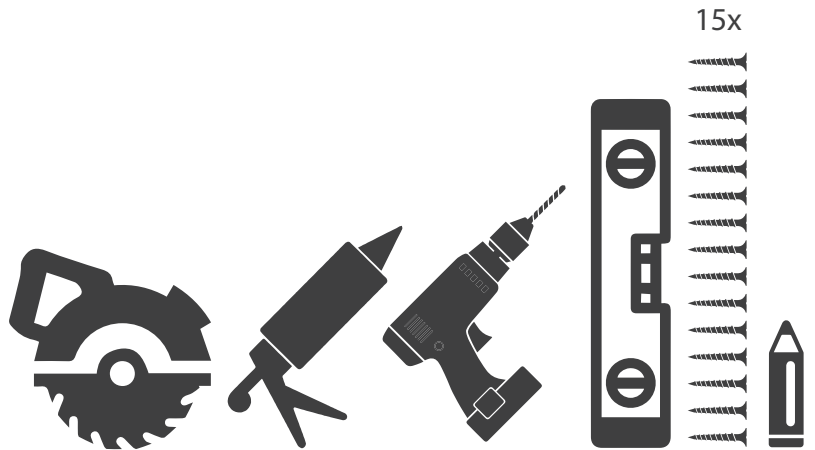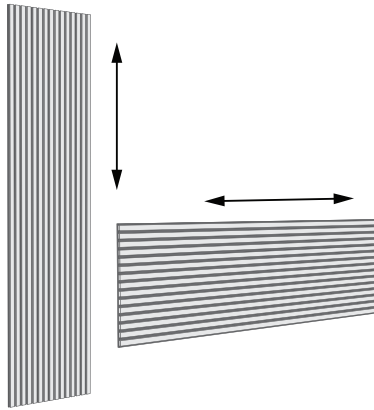

**4 CUTTING**



Select the direction in which the illi panel will be mounted horizontally or vertically. If the panel is cut through wooden slats, a sharp knife is enough to cut the felt. On the other hand, if the panel is to be cut when crossing the wooden slats, an electric circular saw with a fine-tooth cut rod must be used.

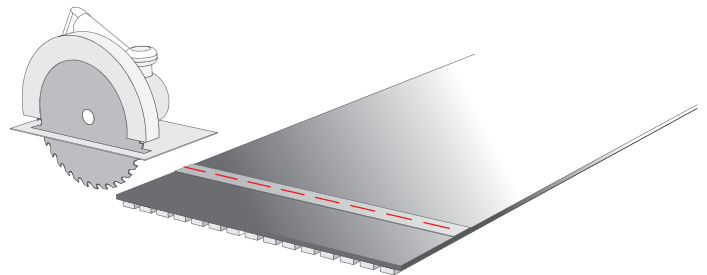

**6 STRENGTHENING**


illi panel is fixed in the room to the ceiling or wall with screws - screwing them in felt without touching the slat. It is recommended to use the illi mounting screws\*. 15 screws are required to fasten one panel. It is recommended to fasten the panels to the wall using wooden slats, which are located in the place of screws.

*\*Montage screws are not included in the set. Screws can be purchased separately.*

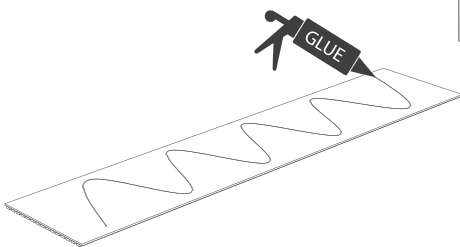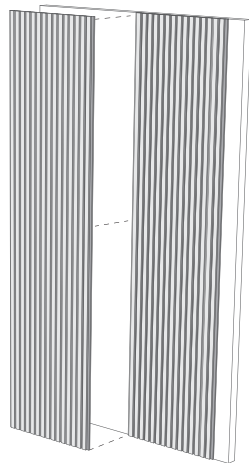

**5 ATTENTION**

When sawing, the panel must be facing down with wooden slats!

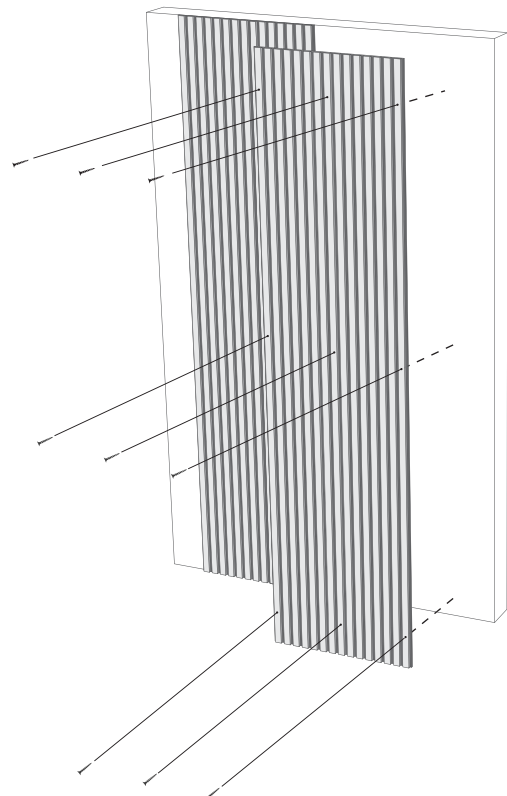

**7 COMMUNICATION WITH THE PROFESSIONAL CRAFTSMAN**

In case of confusion or assembly issues, contact illi panel distributors. Professional opinion for professional result.

+371 26 303 308  
info@illipanel.com